


C600 T75 NT

THREE-PHASE VACUUM CLEANERS FOR CONTINUOUS USE IN THE MANAGEMENT OF LARGE VOLUMES OF MATERIAL



Filter category:

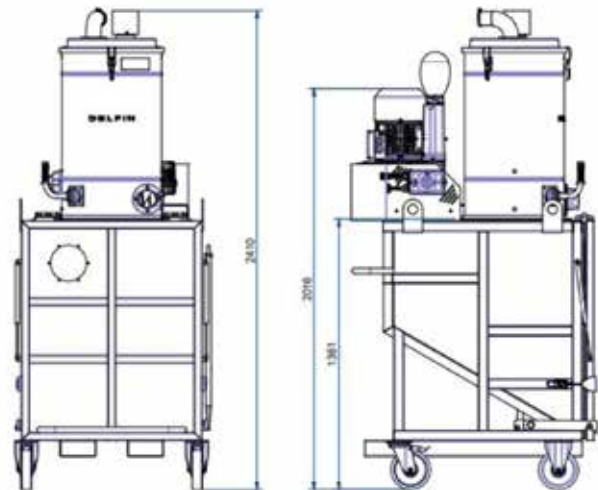

FEATURES

Large quantities of material

Industrial construction with high durability and easy maintenance, with forklift pockets
Complete painted steel construction

Manual filter cleaning system

Compact design and front discharge system

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD
www.delfinvacuums.com
delfin@delfinvacuums.it

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

TECHNICAL DATA

 OPTIONAL

		C600T75NT-001
Voltage	V	400
Power	kW	8.6
Frequency	Hz	50
Current draw	A	15.5
Suction inlet diameter	mm	80
Tank capacity	L.	600
Noise level	dB(A)	76
Dimensions	cm	100x130x250h
Weight	kg	530
Maximum vacuum	mmH2O	3200
Continuous waterlift	mmH2O	2900
Maximum air flow	m³/h	700
Motor Type		Three-phase Turbine
Primary filter		Star
Primary filter load	m³(m²/h)	143
Primary filter surface area	cm2	49000
Primary filter media		Polyester
Filter class (IEC 60335-2-69) primary filter		ANT M
Filter cleaning system		Manual
Discharge system		Front discharge



MACHINE CODE	DESCRIPTION
C600T75NT-001	VACUUM SEPARATOR/600L SUCTION BUCKET 7.5kW THREE-PHASE

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.