



DM3 EL ACD

ACD CERTIFIED INDUSTRIAL VACUUM CLEANER

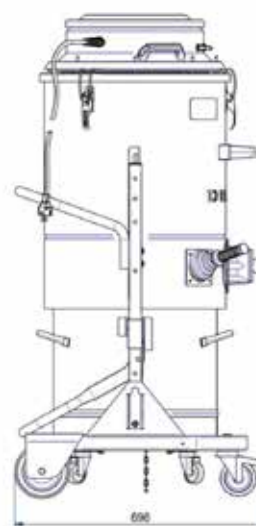

Filter category:

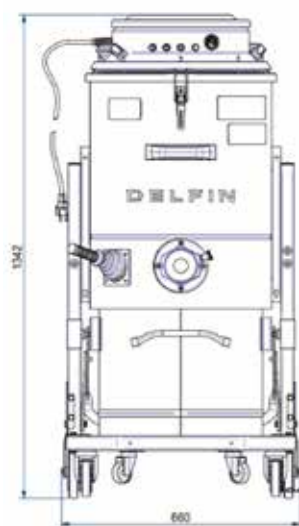

FEATURES

Dust and solids / suitable for work in zone 21-22 (cat. 2D-3D)

Compact and mobile

Stainless steel tank AISI304

Polyester, Antistatic Filter Class M, Integrated manual filter cleaning system

Certified Ex tb Dust Tight IP64 head, ATEX-tested accessories and non-metallic parts

Compliance with EN IEC 62784:2018 for Zone 22

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD
www.delfinvacuums.com
delfin@delfinvacuums.it

COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

TECHNICAL DATA

 OPTIONAL

		DM3ELACD-001
Use Zone		Non-classified environment
Voltage	V	230
Power	kW	3.3
Frequency	Hz	50/60
Current draw	A	15
Suction inlet diameter	mm	80
Tank capacity	L.	60
Noise level	dB(A)	76
Dimensions	cm	66x70x135h
Weight	kg	78
Maximum vacuum	mmH2O	2500
Continuous waterlift	mmH2O	2500
Maximum air flow	m³/h	540
Motor Type		Single-phase Bypass
Primary filter		Star
Primary filter load	m³(m²/h)	180
Primary filter surface area	cm²	30000
Primary filter diameter	mm	500
Primary filter media		Polyester
Filter class (IEC 60335-2-69) primary filter		ANT M
Filter cleaning system		Manual
Absolute HEPA Filter		Standard
Filter area of the absolute filter	cm²	26000
Absolute filter class (EN 1822-5)		H14 with 99.995% efficiency according to the MPPS method



COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED
COPYRIGHT 2026 DELFIN S.R.L. ALL RIGHTS RESERVED

MACHINE CODE	DESCRIPTION
DM3ELACD-001	DM3EL ACD 3BP 60L DT DS X H KIT 50

All data mentioned in this document may change without notice. All data contained in this document is subject to change without notice.

DELFIN
FOR A DUST-FREE WORLD

www.delfinvacuums.com
delfin@delfinvacuums.it